



保证功率

84.95%



✉ @talesun.com

* GL-CN-Ver




	STC	NMOT	STC	NMOT	STC	NMOT
	395	294	400	298	405	302
	30.85	28.8	31.05	29.0	31.24	29.2
	12.81	10.23	12.89	10.30	12.97	10.36
	36.75	34.6	37.00	34.8	37.25	35.1
	13.69	11.04	13.78	11.11	13.86	11.17
	20.22		20.48		20.73	

	5%	10%	15%
	431	451	472
	31.43	31.43	31.43
	13.70	14.36	15.01
	37.50	37.50	37.50
	14.65	15.35	16.04

	10BB
	108 (6*18)
	1722*1134*30_ _ (67.80*44.65*1.18)
	25.5] Y (56.22Te)
	2.0_ _
	2.0_ _
	IP68, 3
	4_ _ , (IEC), 12AI G(GL) 350_ _ (+), 250_ _ (-)
	F01/LJQ-3-CEK/MC4/MC4-EHO2

	1500H/DC
	-40, Cp+85, C
	30A
	C'See
	5400PS 2400PS
	70% <i>f</i> 5%

	36	36(GEA)
	936	720

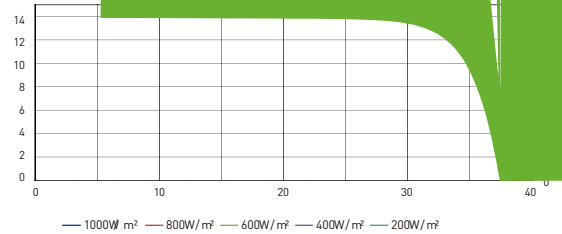

75°C 50°C 25°C