




BIPRO

132-cell

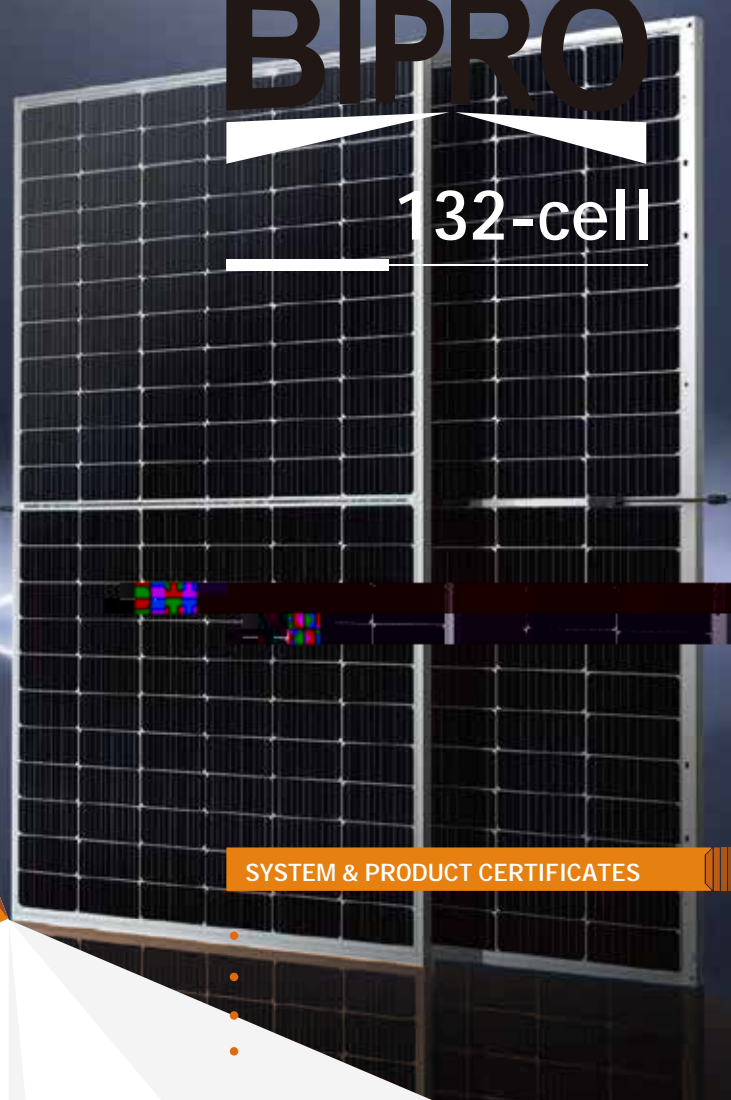

SYSTEM & PRODUCT CERTIFICATES





KEY FEATURES

- PERFORMANCE WARRANTY
- Industry Leading High Yield
- PID Anti
-
-

12 30

Excellent

ELECTRICAL CHARACTERISTICS

Testing Condition	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum Power (Pmax/W)										
Operating Voltage (Vmpp/V)										
Operating Current (Impp/A)										
Open-Circuit Voltage (Voc/V)										
Short-Circuit Current (Isc/A)										
Module Efficiency (%)	46.8% 21.09 cm0 0 m0 -99362									

STC: Irradiance 1000W/m², Spectra at AM1.5, Module Temperature 25 °C. Power output tolerance: 0~+5W, Test uncertainty for Pmax: ±3%

NMOT: Irradiance 800W/m², Spectra at AM1.5, Ambient Temperature 20 °C, Wind speed 1m/s

REAR SIDE POWER GAIN(REFER TO Td()1 -0m0 0 m46 399284 0 Td()T050 TdW/4S648nP 5dW/4S647284 0242 -0 99284 0 0 Td

Pmax gain				
Pmax/W				
Vmpp/V				
Impp/A				
Voc/V				
Isc/A				