




# ISTA

TP8F 66M  
TP8F 66M(H) **132-cell**

**650 - 670W**

12BB PERC

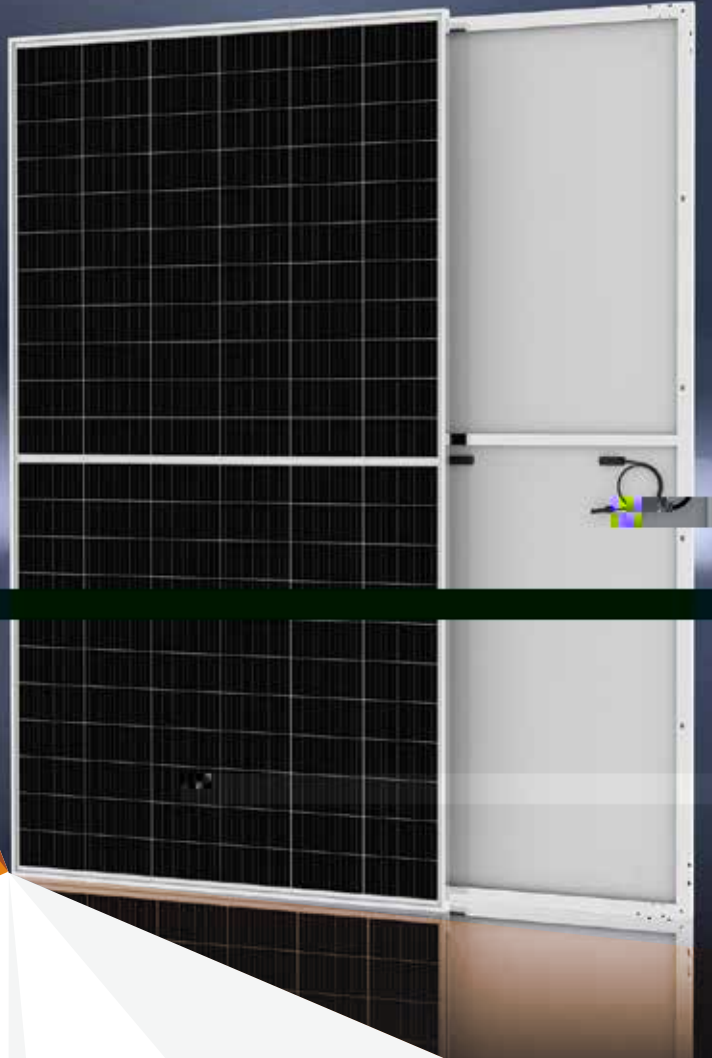

## 体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



## 质量保证

12

25

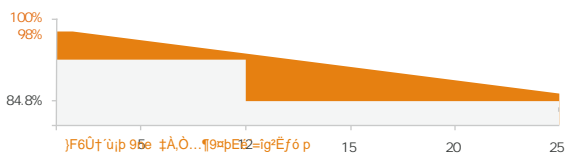

优秀的抗PID性能

PID  
85 / 85% RH 192





IP68接线盒

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	650	492	655	495	660	499	665	503	670	507
	37.8	35.4	38.0	35.6	38.2	35.8	38.4	36.0	38.6	36.1
	17.20	13.88	17.24	13.91	17.28	13.95	17.32	13.99	17.36	14.02
	45.4	42.9	45.6	43.1	45.8	43.3	46.0	43.5	46.2	43.7
	18.29	14.74	18.33	14.77	18.37	14.81	18.41	14.84	18.45	14.87
	20.90		21.10		21.30		21.40		21.60	

	12BB
	132 (6*22)
	2384*1303*35mm (93.86*51.30*1.38 )
	34.5kg (76.06lbs.)
	3.2mm
	IP68, 3
	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

	1000V/1500V/DC
	-40°C~+85°C
	30A
	Class

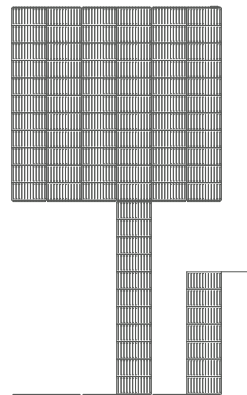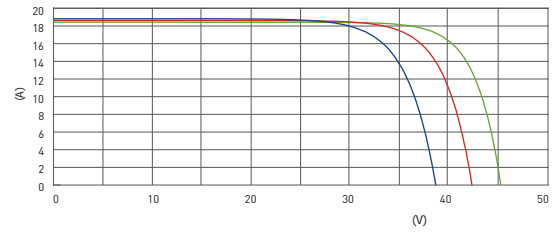

	31	31(USA)
	558	527

