



# BIPRO

TP7G54M  
TP7G54M(H) **108-cell**

**390 - 410W**

Bifacial Module With Transparent Backsheet  
10BB Half-cut Mono Perc



## SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61703
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




## PERFORMANCE WARRANTY

**12** Years  
Quality Assurance

**25** Years  
Power Output Guarantee

Linear Performance Warranty

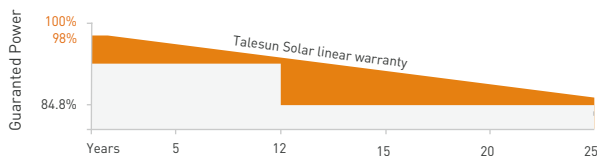

## Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



## Lower LCOE

2% more power generation, lower LCOE



## IP68 Junction Box

High waterproof level

[www.talesun.com](http://www.talesun.com)

[marketing.hq@talesun.com](mailto:marketing.hq@talesun.com)

\* GL-EN-Version 2024.03.22

## REAR SIDE POWER GAIN(REFERENCE TO 410W FRONT)

Pmax gain	5%	10%	15%	20%	25%
Pmax/W	431	451	472	492	513
Vmpp/V	31.43	31.43	31.43	31.43	31.43
Impp/A	13.70	14.36	15.01	15.66	16.31
Voc/V	37.50	37.50	37.50	37.50	37.50
Isc/A	14.65	15.35	16.04	16.74	17.44

## I-V CURVE

— 1000W/m<sup>2</sup> — 800W/m<sup>2</sup> — 600W/m<sup>2</sup> — 400W/m<sup>2</sup> — 200W/m<sup>2</sup> Voltage [V]

## APPLICATION CONDITIONS

Maximun System Voltage	1000V/1500V/DC
Operating Temperature	-40°C~+85°C
Maximun Series Fuse	30A
Safety Protection Class	Class
Mechanical Load	Front side 5400Pa, Back side 2400Pa
Refer. Bifaciality Factor	70%+5%/-10%

— 75°C — 50°C — 25°C Voltage [V]

## TECHNICAL DRAWINGS

## TEMPERATURE CHARACTERISTICS

Temperature Coefficient of Pmax	
Temperature Coefficient of Voc	
Temperature Coefficient of Isc	
Nominal Module Operating Temperature(NMOT)	

## PACKING CONFIGURATION

Pieces Per Pallet	
Pieces Per Container(40'HQ)	



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties 26 0 Td( )Tj0.2 Tj-0.015 Tc 0.015 Tw 0.52.015 Tw 0.528 0 Td(ar)23j0.54 j0.231 0t2.5270.57j0.512 0 Td(n)Tj-527958ra